

The **Smith Meter™ Model G6 Meter** is a 6", double-case, straight-through (S3 through S8) or angle-type (A1 and A3), rotary vane, positive displacement meter. Applications include: blending, batching, dispensing, inventory control and custody transfer of oils, solvents, chemicals, paints, fats, and fertilizers.

Features

- **Superior Accuracy** - The Smith Meter™ Rotary Vane meter principle, combined with the meter's uniquely designed (offset) inlet and outlet nozzles, minimizes pressure drop across the measuring chamber, which reduces flow through meter clearances to maximize accuracy.
- **Low Pressure Drop** - Streamlined flow path provides low pressure drop.
- **Positive and Accurate Registration** - High torque drive calibrator with adjustment in 0.05% increments ensures accuracy registration.
- **Long Service Life** - Low friction ball bearings, fixed cam-type timing, and rugged construction give sustained accuracy and long service life.

Options

- **High Viscosity Meter Clearances** - To extend operation at maximum flow rate from 400 mPa•s to 2,000 mPa•s.
- **High Temperature Clearances** - To extend operating temperatures from 150°F to 200°F (65°C to 93°C).
- **All Iron Trim** - For operating temperatures above 200°F (93°C).
- **LPG Trim** - For low lubricity liquids such as LPG.
- **NACE Construction** - Special components available to meet requirements of NACE Standard MR-01-75.

Operating Specifications

Maximum Flow Rate

	USGPM	L/min
Continuous Rating - Standard Trim	1,000	3,750
Intermittent Rating ¹ - Standard Trim	1,200	4,600
Continuous Intermittent Rating - All Iron or LPG Trim	750	2,800

¹ Intermittent rating applies to service on clean, refined products where continuous operation is not required (e.g., truck loading, rail loading, and other batching applications).

² Linearity based on a maximum flow rate of 1,000 USGPM (3,750 L/min) unless otherwise stated.

³ 1,000 mPa•s = 1,000 cP = 1 Pa•s.



Model G6-S3

Minimum Flow Rate - Typical Performance

Linearity ²	Units	Viscosity (mPa•s)					
		0.5	1	5	20	100	400
±0.15%	USGPM	160	100	40	8	1.40	0.70
	L/min	606	378	152	30	5.30	2.65
±0.25%	USGPM	120	75	30	6	1.00	0.50
	L/min	455	284	114	23	3.80	1.90
±0.50%	USGPM	80	50	20	4	0.70	0.35
	L/min	303	190	76	15	2.65	1.33

Repeatability

±0.02%

Viscosity

Standard: 400 mPa•s³ (2,000 SSU) maximum.

Optional: 2 Pa•s (10,000 SSU) maximum - specify "High Viscosity Meter Clearances."

Over 2 Pa•s - specify "High Viscosity Meter Clearances" and derate maximum flow rate in direct proportion to viscosity over 2 Pa•s (e.g., at 4 Pa•s, derate maximum flow rate to 50% of normal continuous rating - 500 USGPM).

Temperature

Standard Meter Clearances With:

Buna N/EPR/Teflon: -20°F to 150°F (-29°C to 65°C).
Viton: 10°F to 150°F (-12°C to 65°C).

High Temperature Meter Clearances With:

Buna N/EPR/Teflon: -20°F to 200°F (-29°C to 93°C).
Viton: 10°F to 200°F (-12°C to 93°C).

All Iron Trim With:

Buna N: -20°F to 225°F (-29°C to 108°C).

EPR: -20°F to 300°F (-29°C to 149°C).

Teflon: -20°F to 400°F (-29°C to 205°C).

Viton: 10°F to 400°F (-12°C to 205°C).

Meter Gearing


Five U.S. Gallons, one Barrel, or five Dekalitres per revolution of meter calibrator output shaft.

Maximum Working Pressure

Model	Flange	PSI	kPa
G6-A1	150	150	1,034
G6-S3	150	285 ⁴	1,965 ⁴
G6-A3	150	285 ⁴	1,965 ⁴
G6-S5	300	300	2,068 ⁴
G6-S6	300	740 ⁴	5,102 ⁴
G6-S7	600	1,480 ⁴	10,204 ⁴
G6-S8	900	2,220 ⁴	15,307 ⁴

Note: Flange Class per ANSI B16.5 Raised Face Flange.

Pressure Drop (ΔP)

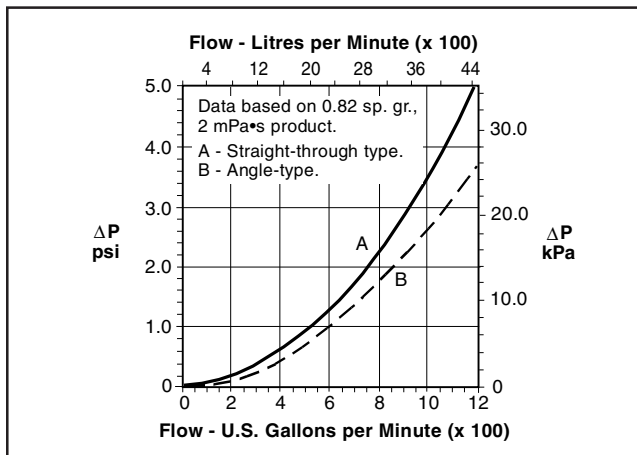

Accessories

Strainer

6" steel, R.F. flanged, 4 mesh or finer screen.

Mechanical Preset Valves⁸

6" straight-through type, steel, flanged, 285 psi maximum working pressure.

Hydraulic Valves⁸

6" globe-type, steel, R.F. flanged, 300 psi maximum working pressure.

Air Eliminator

6" steel, R.F. flanged, 300 psi maximum working pressure.

Materials of Construction

Trim	Housing	Internals	Seals
Standard	Steel	Iron, Steel, Stainless Steel, Aluminum	Buna N ⁵ , Viton, EPR, or Teflon
LPG	Steel	Add Rulon and Nylon	Buna N ⁵ , Viton, EPR, or Teflon
All Iron	Steel	Delete Aluminum	Buna N ⁵ , Viton, EPR, or Teflon

Installation

It is recommended that the meter be protected with a suitable mesh strainer.

Ordering Information

Application	Batching, Loading, Blending, Inventory, Process Control, etc.
Operating Conditions	Liquid — Name, Specific Gravity or API Gravity, Flow Range ⁶ , Temperature Range ⁶ , Viscosity Range ⁶ , Maximum Working Pressure.
Seals	Buna N ⁷ , Viton, EPR, or Teflon.
Units of Registration	Gallons, Barrels, Litres, Dekalitres, Pounds, Kilograms.
Direction of Flow	Left-to-right (as viewed above) is standard and will be supplied unless right-to-left flow is specified.
Style	Straight-through or Angle-type.
Options & Accessories	As required.

⁴ Maximum working pressure at 100°F (38°C).

⁵ Standard.

⁶ Specify: minimum/normal/maximum.

⁷ Standard seals supplied unless optional material specified.

⁸ Not compatible with higher pressure models.

Counters

200 Series - Accumulative, nine-digit, non-reset type,

600 Series - Five-large digit reset, eight small-digit non-reset.

Printer

Seven-digit accumulative.

Optional six-digit zero start.

Preset Counter

300C Series - Four-digit (five-digit optional) mechanical pushbutton preset with valve linkage. Microswitch package for hydraulic valve, pump control, or other interlock optional.

Accessories (continued)

Pulse Transmitters

Type E - SPDT Mercury-Wetted Switch.

LNC Pulse Transmitter (adapts to 600 Series Counters).

Low Resolution - 1 or 10 pulses⁹.

High Resolution (HR) - 50 or 100 pulses⁹.

UPT - Quad-channel, infrared, security pulse transmitter in an explosion-proof housing (up to 1,000 pulses/rev.).

Flow Rate Indicator

Direct mount mechanical.

Remote electronic.

Remote Registration

Electromechanical counters.

Electronic totalizers.

Automatic Temperature Compensation

Model ATC - Factory-set for a given product.

Model ATG - Field-adjustable for different products.

Catalog Code

The following guide defines the correct PD meter for a given application and the respective catalog code. This code is part of the ordering information and should be included on the purchase order.

1	2	3	4	5	6	7	8	9	10
K	G	6	S	1	B	B	S	0	0

Position 1: Code

K - Catalog Code

Positions 2 and 3: Model/Flange Size

G6 - 6" (G6)

Position 4: Flow Path

S - Straight

A - 90° Angle

V - Vertical

Position 5: Pressure Class and End Connections

Standard (Raised Face Flanges)

1 - Class 150, 150 psig/1,034 kPa

3 - Class 150, 285 psig/1,965 kPa

5 - Class 300, 300 psig/2,068 kPa

6 - Class 300, 740 psig/5,102 kPa

7 - Class 600, 1,480 psig/10,204 kPa

8 - Class 900, 2,220 psig/15,307 kPa

PED (Raised Face Flanges)

1 - Class 150, Not Available

3 - Class 150, 285 psig/1965 kPa

5 - Class 300, 300 psig/2,068 kPa

6 - Class 300, Consult Factory

7 - Class 600, 1,480 psig/10,204 kPa

8 - Class 900, 2,220 psig/15,307 kPa

All Flanges designed to ANSI B16.5, Pressure Ratings Maximum Working Pressure at 100° F

Position 6: Meter Gearing

G - Gallons (5:1 - A1, V3, S3 through S7)

B - Barrels (1:1 - A1, V3, S3 through S7)

D - Dekaliters (5:1 - A1, V3, S3 through S7)

I - Imperial Gallons¹⁰

P - Pound¹⁰

Position 7: Seals

B - Buna-N

V - Viton

T - Teflon

Position 8: Trim

S - Standard

A - All Iron

L - LPG

Position 9: Temperature Compensation

0 - None

A - ATC

B - ATG

Position 10: Special Requirements

0 - Standard

P - PED


⁹ Per revolution of LNC right-hand wheel.

¹⁰ Consult factory for model number when selecting Imperial or Pound gearing.

Dimensions

Inches (mm)

It is recommended that meter be protected with a suitable mesh strainer.

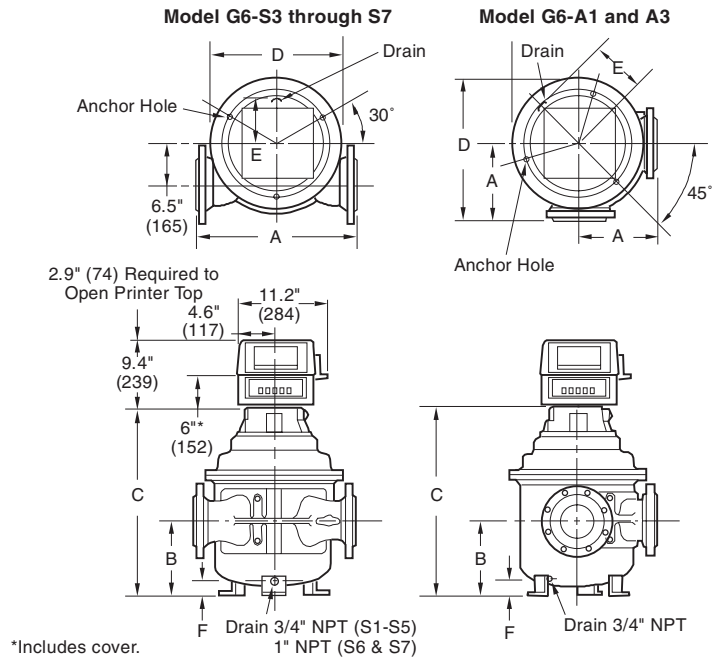

Meter Anchor Bolt Holes
3 - 0.8" (20) Bolt Holes on a
15" (381) Diameter Bolt
Circle.

Model	Dimensions						Weight
	A	B	C	D	E	F	
G6-S3	23.0" (584)	10.6" (270)	27.0" (686)	20.1" (511)	6.4" (163)	1.3" (33)	435 lb (197 kg)
G6-S5	24.0" (610)	10.6" (270)	27.0" (686)	20.1" (511)	6.4" (163)	1.3" (33)	485 lb (220 kg)
G6-S6	28.9" (734)	11.5" (292)	29.6" (752)	23.0" (584)	7.3" (185)	1.4" (36)	930 lb (433 kg)
G6-S7	30.9" (785)	12.0" (305)	30.9" (785)	24.3" (617)	7.3" (185)	1.4" (36)	1,305 lb (592 kg)
G6-A1	12.0" (305)	10.6" (269)	25.3" (643)	21.9" (556)	6.4" (163)	1.3" (33)	430 lb (195 kg)
G6-A3	12.0" (305)	10.6" (269)	27.0" (686)	21.9" (556)	6.4" (163)	1.3" (33)	435 lb (197 kg)


Note: Dimensions—Inches to the nearest tenth (millimetres to the nearest whole mm), each independently dimensioned from respective engineering drawings.

Dimensions

Inches (mm)

Model G6-S8

It is recommended that meter be protected with a suitable mesh strainer.

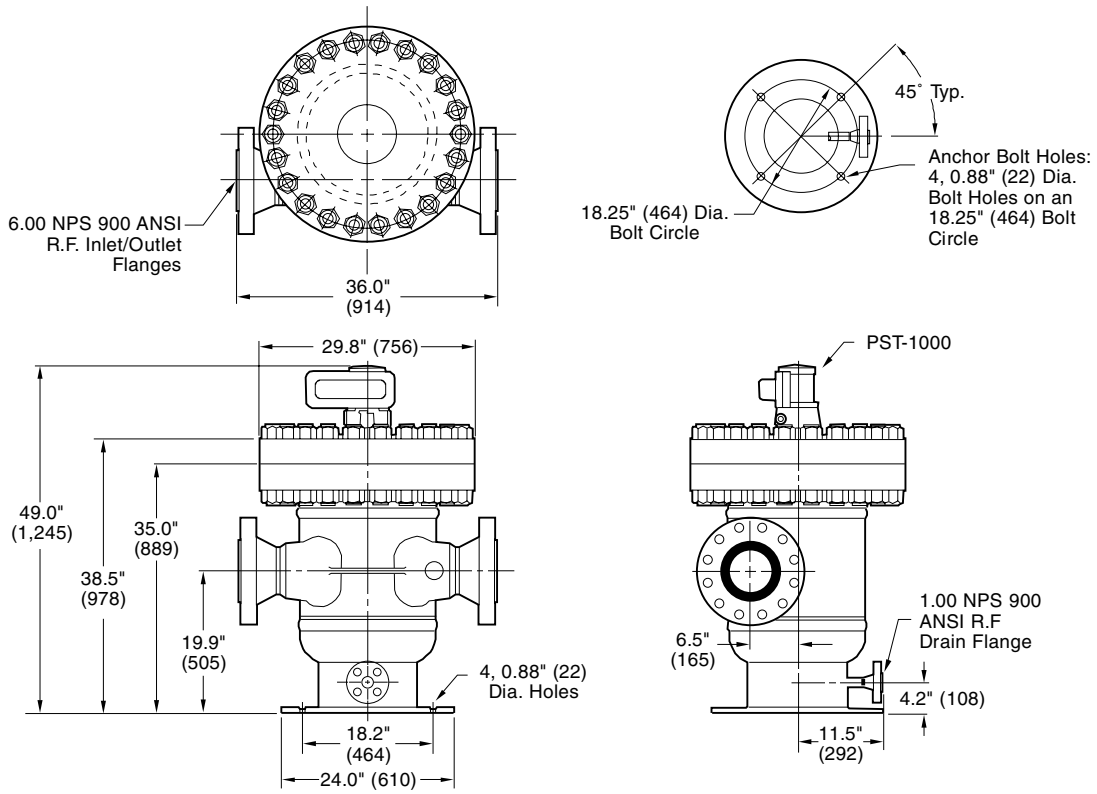

Note: Dimensions—Inches to the nearest tenth (millimetres to the nearest whole mm), each independently dimensioned from respective engineering drawings.

Weight: 2,800 lb (1,273 kg).

Revisions included in SS01014 Issue/Rev. 0.6 (2/07)

Page 2: Deaerator changed to Air Eliminator

Page 3: Revised Pulse Transmitter to include UPT and removed PEXP and PPS; removed Model LEATC from Automatic Temperature Compensation.

The specifications contained herein are subject to change without notice and any user of said specifications should verify from the manufacturer that the specifications are currently in effect. Otherwise, the manufacturer assumes no responsibility for the use of specifications which may have been changed and are no longer in effect.

Headquarters:

1803 Gears Road, Houston, TX 77067 USA, Phone: 281/260-2190, Fax: 281/260-2191

Gas Measurement Products:

Houston, TX USA Phone 281/260-2190
Thetford, England Phone (44) 1842-82-2900
Kongsberg, Norway Phone (47) 32/286-700
Buenos Aires, Argentina Phone 54 (11) 4312-4736

Integrated Measurement Systems:

Corpus Christi, TX USA Phone 361/289-3400
Kongsberg, Norway Phone (47) 32/286-700
San Juan, Puerto Rico Phone 787/274-3760
United Arab Emirates, Dubai Phone 971 +4/331-3646

Liquid Measurement Products:

Erie, PA USA Phone 814/898-5000
Los Angeles, CA USA Phone 661/702-8660
Slough, England Phone (44) 1753-57-1515
Ellerbek, Germany Phone (49) 4101-3040
Barcelona, Spain Phone (34) 93/201-0989
Moscow, Russia Phone (7) 495/564-8705
Melbourne, Australia Phone (61) 3/9807-2818

Beijing, China Phone (86) 10/6500-2251
Singapore Phone (65) 6861-3011
Chennai, India Phone (91) 44/450-4400

Visit our website at www.fmctechnologies.com